


# SV1108S

## 1U High-Density Storage Solution

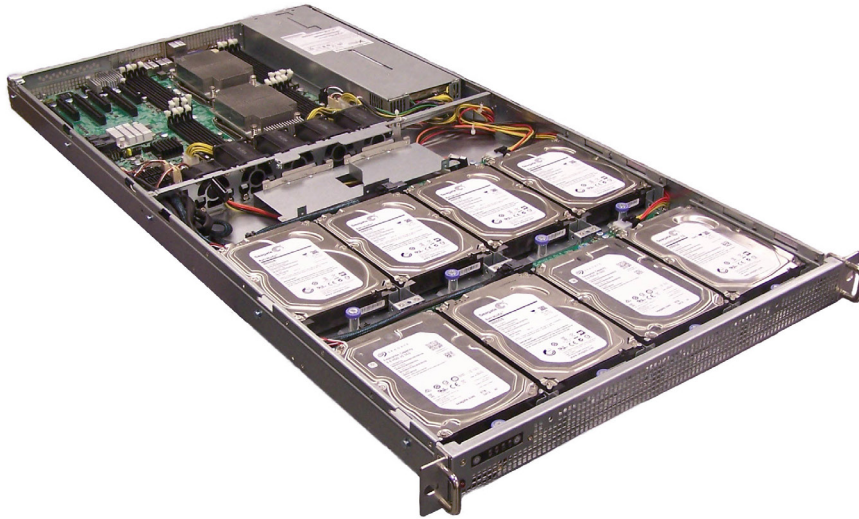

With exceptional high-density storage housed in a space saving design, StackVelocity's 1U 8-bay storage solution delivers unprecedented data-mobility speeds with high reliability and lower power and operating costs.

This 1U 8-bay storage solution enables you to run object storage applications more efficiently and economically by providing abundant storage space and strong computing power support for constantly changing application requirements. The tool-less design makes installation and maintenance a snap, enabling you to keep downtime to a minimum.

### Features and Benefits

To manage and operate a data center, it is important to maintain low costs but also provide the maximum uptime for your customers. The 1U storage solution provides an efficient and economical system with abundant storage that achieves price optimization.

You can tackle your most demanding storage performance requirements with the 1U storage solution's key features:

- High-density, space-saving design
- Support for NVMe and SATA/SAS hard disk drives (HDD)s and solid-state drives (SSD)s
- Tool-less design supports quick installation and easy maintenance
- Tool-less 3.5" and 2.5" drive trays
- Tool-less top cover
- Easy swap fans designed to minimize rotational vibration while providing superior cooling
- Hot swappable and redundant power supply units

**STACK**<sup>®</sup>  
VELOCITY

# SV1108S

## 1U High-Density Storage Solution

### Specifications

Chassis	
Form Factor	1U EIA 310-D Rackmount
Model	SV1108S-2V4-1
Processor/Cache	
CPU	<ul style="list-style-type: none"><li>2x Intel® Xeon® E5-2600 v3/v4</li><li>Dual Socket R3 (FCLGA2011-3)</li></ul>
Cores/Cache	Up to 18 cores/45MB cache
System Memory	
Memory Capacity	<ul style="list-style-type: none"><li>Up to 16x DDR4 DIMM slots</li><li>Up to 2400MHz RDIMM</li></ul>
Memory Type	Up to 2400 ECC DDR4 SDRAM 72-bit
DIMM Size	RDIMM: 32GB, 16GB, 8GB, 4GB
On-Board Devices	
Chipset	Intel® C612 Chipset
IPMI	IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Network Controllers	<ul style="list-style-type: none"><li>Dual port 1GbE, (Intel® Ethernet Controller I350-BT2)</li><li>Optional dual 10GbE Base-T</li></ul>
Additional Input/Output	
USB	2x USB 3.0 (rear), 2x USB 2.0 (rear)
Video	1 external VGA port
Serial Port/Header	1 external DB-9 serial port
Dimensions	
W x H x L	19" x 1.7" x 35.8"
Weight	31 lbs barebone system

Front Panel	
Buttons	<ul style="list-style-type: none"><li>Power Off/On</li><li>System Reset (rear)</li></ul>
LEDs	<ul style="list-style-type: none"><li>Network Activity</li><li>Drive Status</li><li>System Fault</li></ul>
Expansion Slots	
PCIe	1x PCIe v3.0 x16 add-on card
Drive Bays	
Storage Drives	<ul style="list-style-type: none"><li>8x 3.5" drives or 2.5" drives configurable for hot swappable or optional non-hot swappable</li><li>2x internal SATA DOM (optional)</li><li>2x internal 2.5" HDD (optional)</li></ul>
System Cooling	
Fans	3 +1 redundant fans
Power Supply	
500W 1+1 Redundant Gold certified hot swappable PSUs	
Total Output Power	500W
Input	110-240Vac/8-4A/50-60Hz
Operating Environment/Compliance	
Operating Temperature	10°C to 35°C
Non-Operating Temperature	- 40°C to 65°C
Operating Altitude	0 to 10,000 ft.
Non-Operating Altitude	0 to 40,000 ft.
Compliance/Regulatory	RoHS, FCC, ETL, CE

#### Warranties and Limitation of Liability

This document provided by StackVelocity is provided "as is" without warranties of any kind, whether express or implied, including but not limited to implied warranties of merchantability, fitness for a particular purpose, and non-infringement. StackVelocity has made every effort to include accurate and timely information about its products and services. However, StackVelocity has not made and does not make any warranties or representations as to its accuracy or completeness. StackVelocity assumes no liability or responsibility for any errors or omissions in this document. When you use such StackVelocity information, you are doing so at your own risk and you expressly understand and agree that under no circumstances shall StackVelocity be liable for any direct, indirect, incidental, special, consequential or exemplary damages resulting from your use of this document.

